

COMPACT LED DRIVERS



ComfortLine – SELECTABLE CURRENT (OUTPUT TERMINAL)

186846, 186847, 186848, 186849, 186850, 186851

Typical Applications

Built-in in compact luminaires for

- Shop lighting
- Downlights

ComfortLine – with selectable current

- **SELECTABLE OUTPUT CURRENT**
- **VERY COMPACT SHAPE**
- **VERY LOW RIPPLE (< 1 %)**
- **LONG SERVICE LIFETIME: UP TO 100,000 HRS.**
- **PRODUCT GARANTUEE: 5 YEARS**



ComfortLine LED Drivers – with Selectable Current

Product features

- Compact casing shape

Functions

- Selectable current output by secondary side terminal.
- The required current output can be chosen by selecting the respective pin at the output terminal.

Electrical features


- Mains voltage: 220–240 V $\pm 10\%$
- Mains frequency: 50–60 Hz
- Push-in terminals: 0.2–1.5 mm²
- Power factor at full load: > 0.95
- Secondary side switching of LED modules is not allowed.

Safety features

- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Overtemperature protection
- Protection against "no load" operation
- Degree of protection: IP20
- Protection class II
- SELV


Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
186846	18	75	93
186847	18	75	118
186848	18	75	118
186849	18	75	120
186850	18	75	118
186851	18	75	96

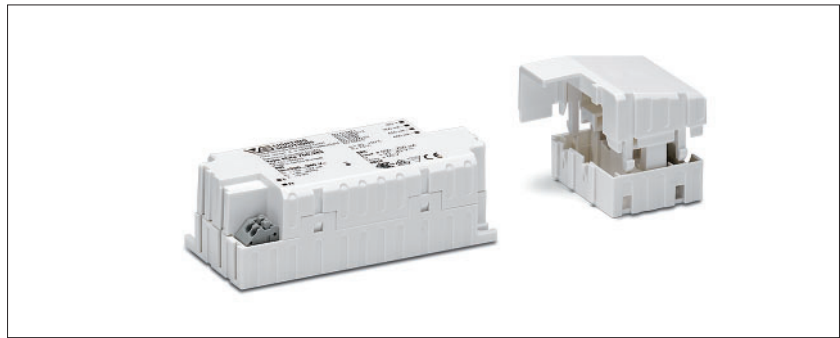

Dimensions

- Casing: K33.1
- Length: 97 mm
- Width: 43 mm
- Height: 30 mm

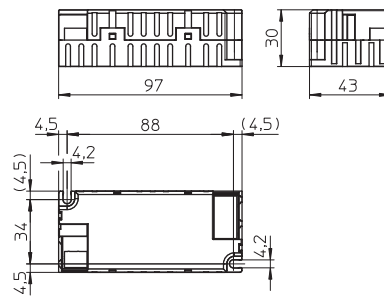

Used standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 55015



186849




Cord grip for K33.1

Available for independent operation

Contains two cord grips

Ref. No.: 186690



Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

ComfortLine – Selectable Current (Output Terminal)

Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA (\pm 5%)	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
17	ECXe 500.242	186846	220–240	93–86	16,5 / 260	400	25–43	11	> 85	< 1
19				104–96		450				
22				113–105		500				
22	ECXe 600.255	186851	220–240	113–105	16,5 / 260	500	25–43	14	> 87	< 1
24				125–115		550				
26				132–125		600				
26	ECXe 700.243	186847	220–240	132–125	19 / 270	600	25–43	12	> 87	< 1
28				147–135		650				
30				156–143		700				
30	ECXe 800.254	186850	220–240	156–143	19 / 270	700	25–43	12	> 88	< 1
32				166–153		750				
34				175–163		800				
34	ECXe 900.244	186848	220–240	175–163	19 / 270	800	25–43	9	> 89	< 1
37				187–172		850				
39				198–182		900				
41	ECXe 1050.245	186849	220–240	209–193	19 / 270	950	25–43	11	> 89	< 1
43				219–202		1000				
45				230–211		1050				

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.






Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C max.	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
186846, 186851, 186847	-20	+60	5	95	-40	+80	5	95	+80	IP20
186850	-20	+55								
186848, 186849	-20	+50								

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. all types		
	65 °C	75 °C	80 °C
hrs.	100.000	50.000	35.000

Product labels

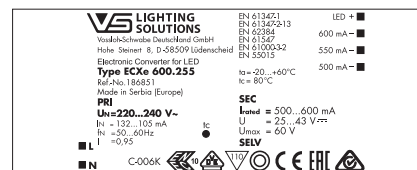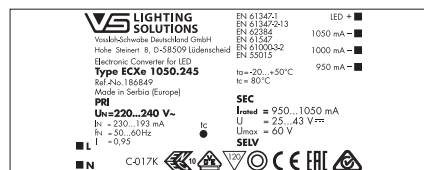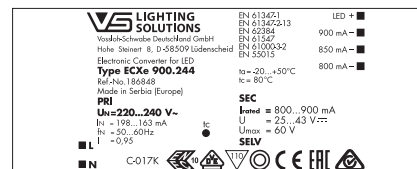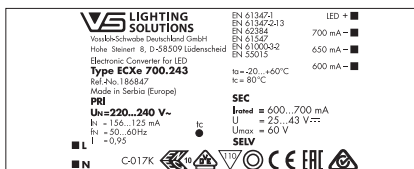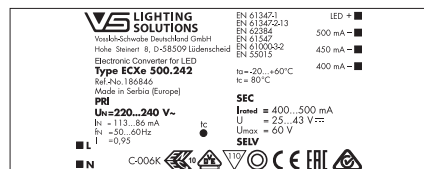


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.


ComfortLine – Selectable Current (Output Terminal)

Typ. performance graphs for 186846 / Type ECXe 500.242


Working area

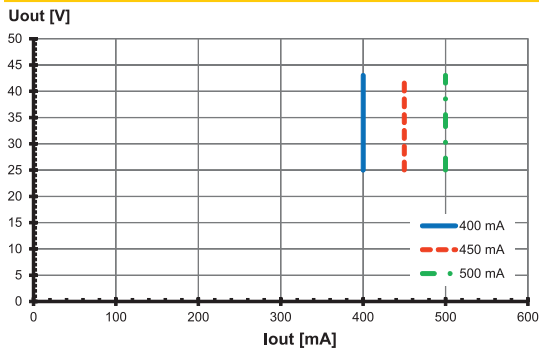


Efficiency

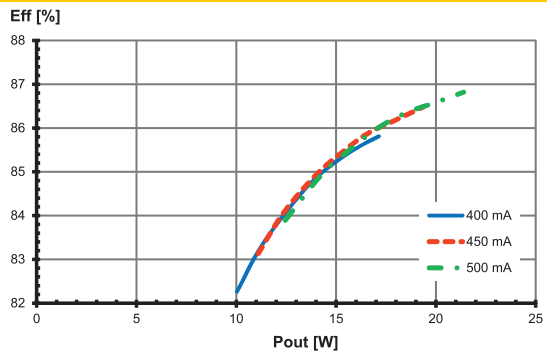

Power factor

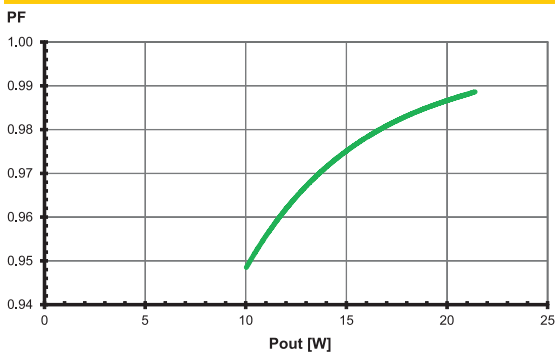


Total harmonic factor (THD)

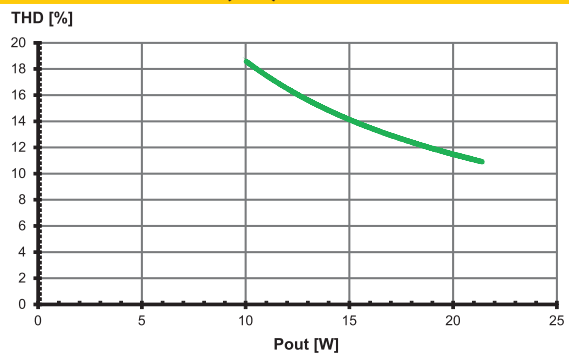


Typ. performance graphs for 186851 / Type ECXe 600.255


Working area

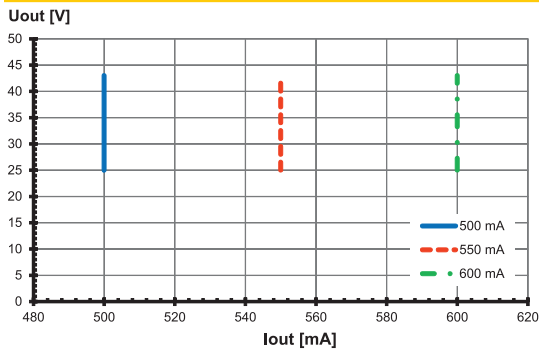


Efficiency

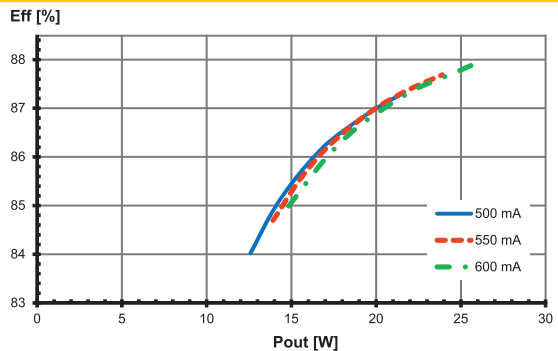

Power factor

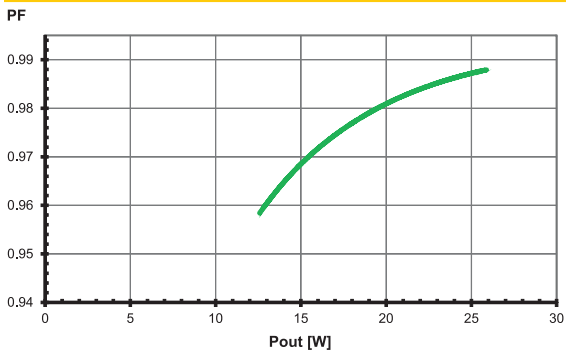

Total harmonic factor (THD)

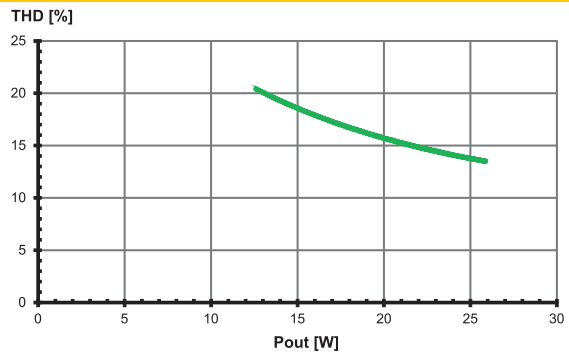


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.


ComfortLine – Selectable Current (Output Terminal)

Typ. performance graphs for 186847 / Type ECXe 700.243


Working area

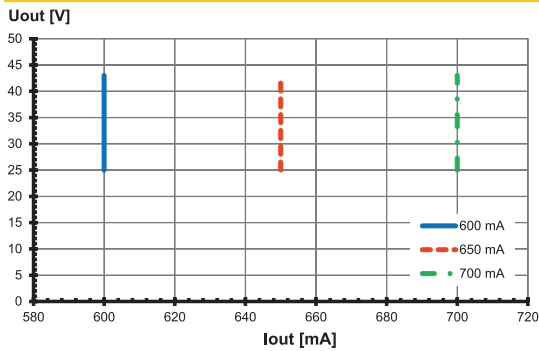


Efficiency

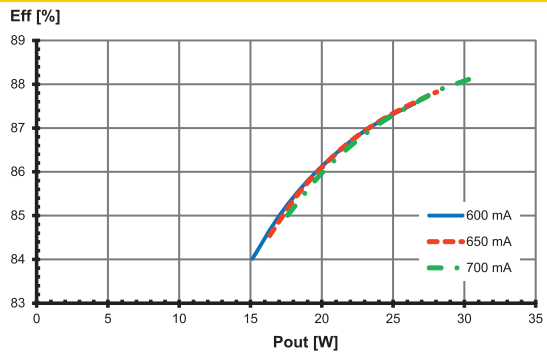

Power factor

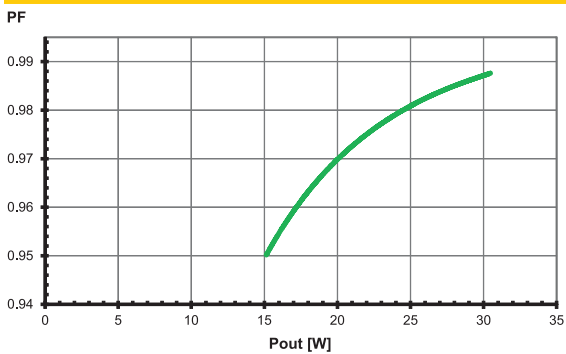


Total harmonic factor (THD)

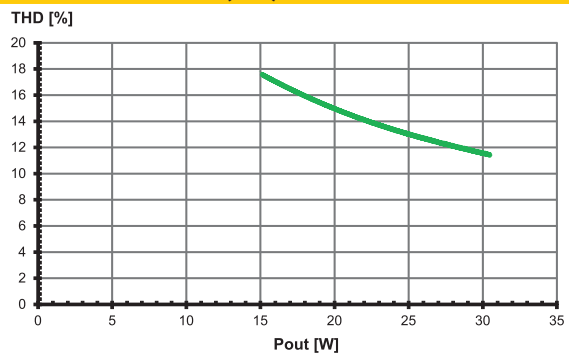


Typ. performance graphs for 186850 / Type ECXe 800.254


Working area

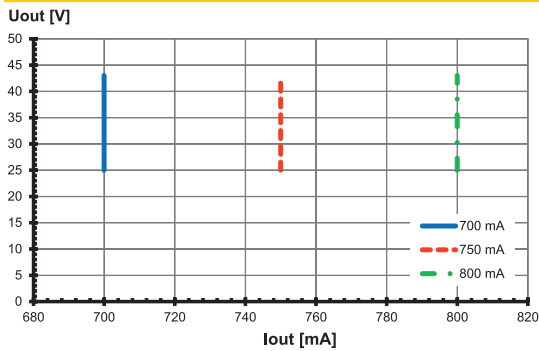


Efficiency

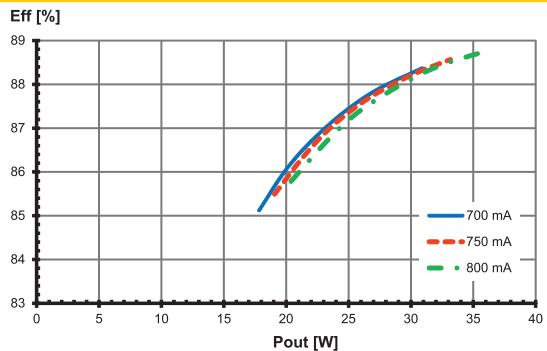

Power factor

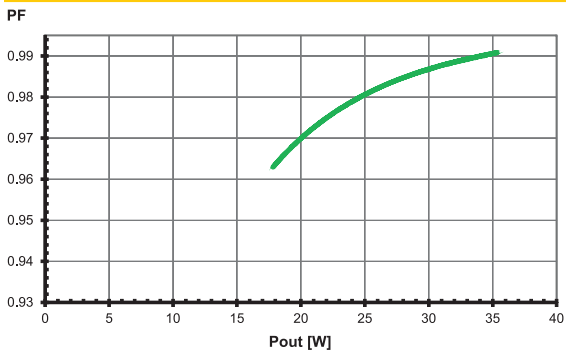

Total harmonic factor (THD)

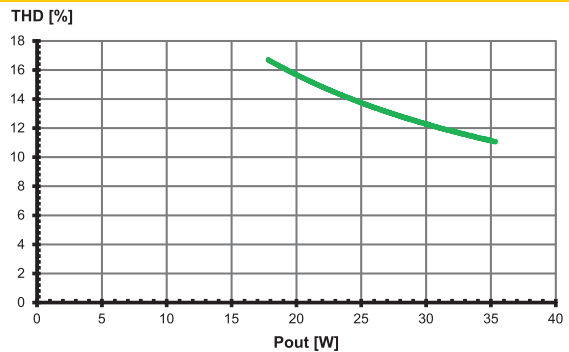


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.


ComfortLine – Selectable Current (Output Terminal)

Typ. performance graphs for 186848 / Type ECXe 900.244


Working area

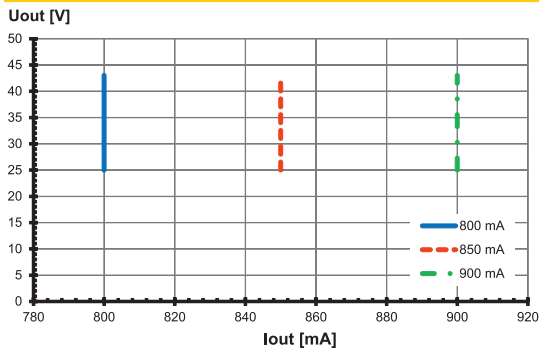


Efficiency

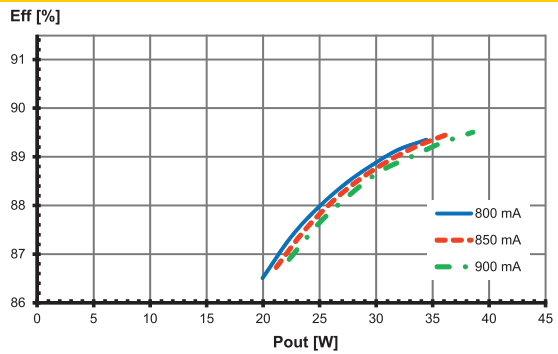

Power factor

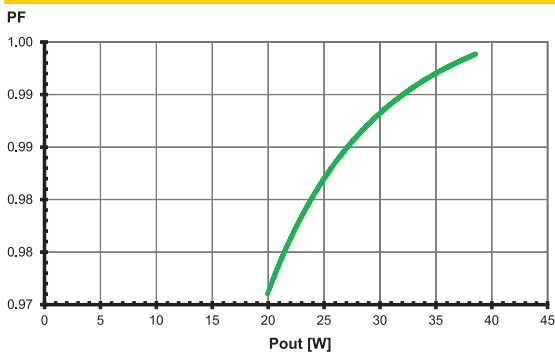


Total harmonic factor (THD)

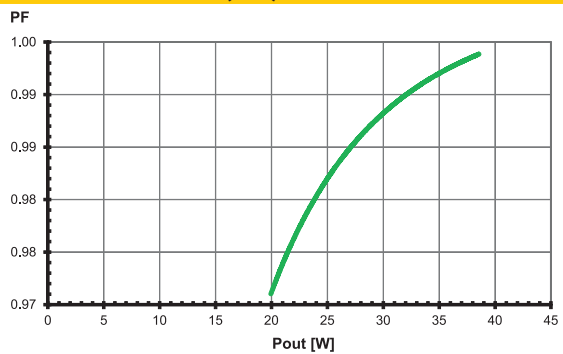


Typ. performance graphs for 186849 / Type ECXe 1050.245


Working area

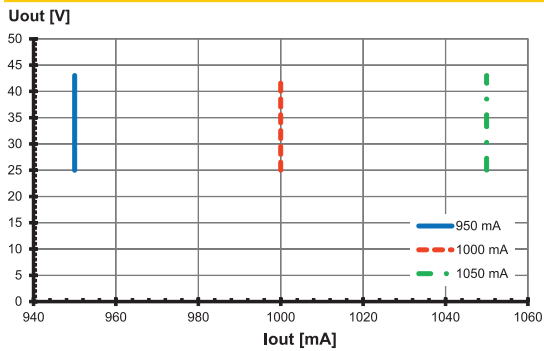


Efficiency

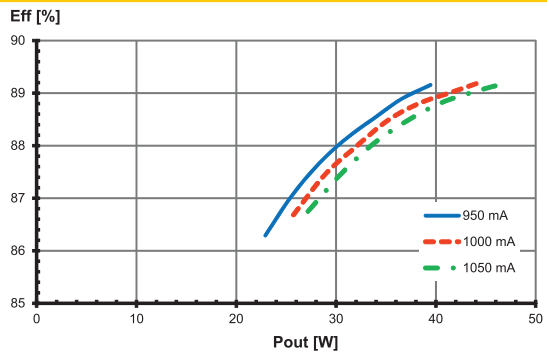

Power factor

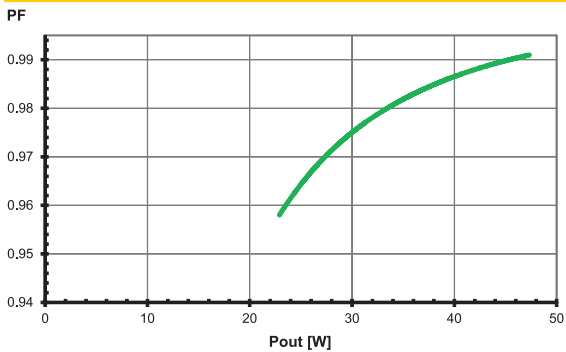

Total harmonic factor (THD)

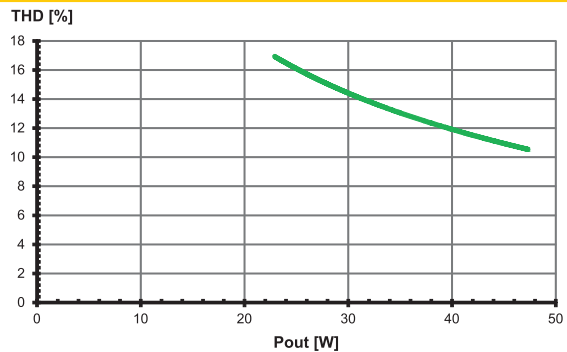

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Safety functions

- Transient mains peaks protection:
Values are in compliance with EN 61547
(interference immunity).
Surges between L/N: up to 1 kV
- Short-circuit protection: The control gear is protected against permanent short-circuit with automatic restart function.
- Overload protection: The control gear only works in range of rated output power and voltage problemfree (< 60 V DC).
Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection. In case of overheating the output current of the control gear will be reduced. After the temperature will drop below the critical temperature value, the output current rises again to the previously set value.
- No load operation: The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1


Mechanical mounting

- Mounting position: Built-in: Any position inside a luminaire is allowed
Independent application: Drivers are allowed to use for independent applications with separate cord grip (Ref. No.: 186690).
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices. Independent LED drivers do not need to be integrated into a casing. Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing. LED drivers should be mounted with the greatest possible clearance to heat sources. During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of 0.2–1.5 mm²
- Stripped length: 8.5–10 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference). Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another. Max. secondary side lead length: 0.8 m
- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.

- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.
- Parallel wiring: Parallel connection of LED loads is not allowed.
- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m Ω (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
ECXe 500.242	186846	19	24	30	31	41	50
ECXe 600.255	186851	19	24	30	31	41	50
ECXe 700.243	186847	15	20	26	25	35	43
ECXe 800.254	186850	15	20	24	25	33	41
ECXe 900.244	186848	15	20	24	25	33	41
ECXe 1050.245	186849	15	20	24	25	33	41

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB-6K (Ref. No.: 149820) or ESB-16HS (Ref. No.: 149821) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.